


City Led Motor 4412



OPTIONAL

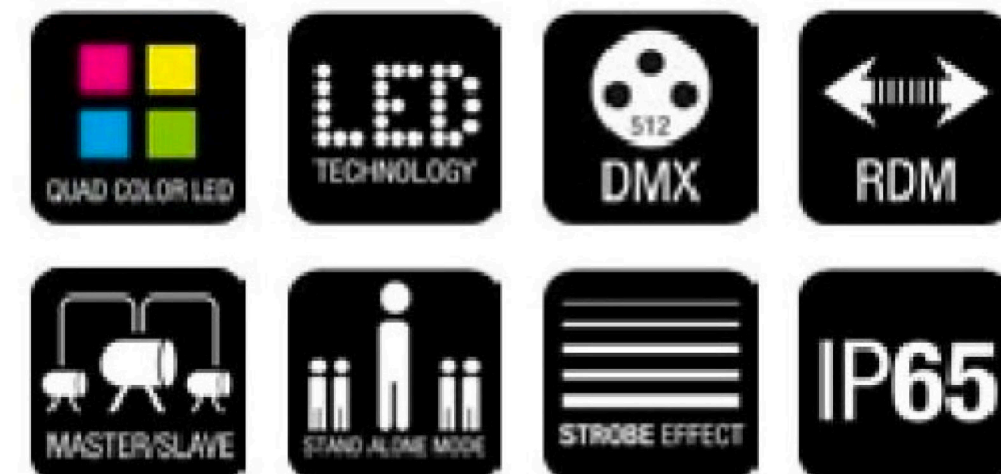


Optional accessories



Diffuser

- ✓ Ultra High performance ultra-bright 10W LEDs with customized optical lens produce high brightness
- ✓ RDM (Remote Device Management) support
- ✓ Tilt movement DMX controllable
- ✓ Multiple electronic strobe and variable dimming Curve modes
- ✓ Temperature controlled fans for optimized operation and low noise
- ✓ Seetronic IP65 sockets and connectors for DMX In/Out and Power In/out
- ✓ Packing size: 56X36X26 cm
- ✓ G.W: 12.5KGs

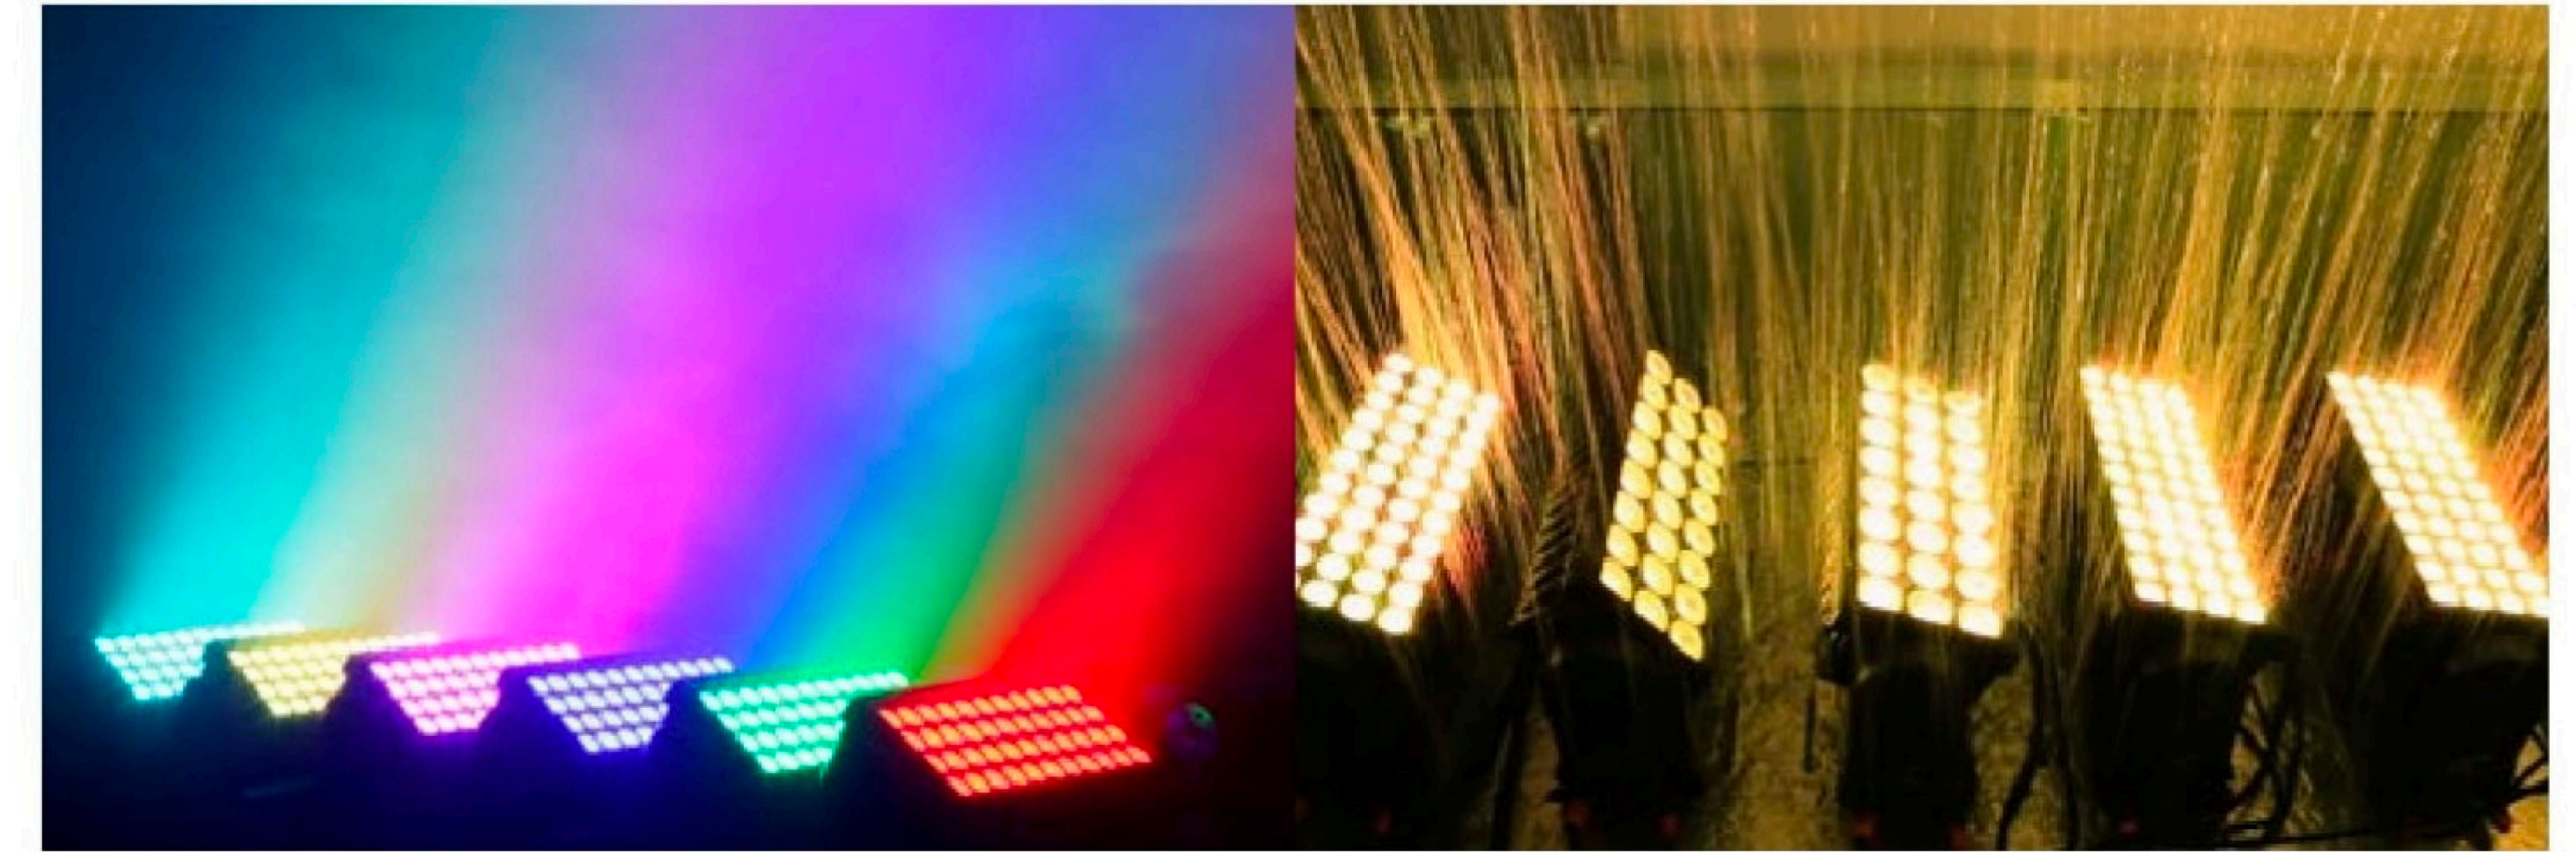


44x12W RGBWA+UV

Equipped with a total of forty-four 10 W RGBW LEDs, the CL Comet 44IP is a powerful IP65 rated wash light for demanding outdoor applications. In addition to RDM and standard DMX capability, Comet 44IP providing a choice of 25°, 35°, 45° beam angles and 2.4 GHz W-DMX™ receiver by Wireless Solution Sweden AB for convenient wireless control. The Comet 44IP also features dynamic movement with a 16 bit, 185° tilt range, allowing you to place effects exactly where and when you want them to be – and get the most possible power and impact.

Light Source	44 x 10W / (15W) RGBW 4in1 Leds, 44 x 12W RGBWA+UV 6in1 Leds
Average LED lifetime	50,000 hrs.
Beam Angle	25° / 35° / 45° reflector (optional)
DMX Mode	7-channel, 7-channel (CTC), 9-channel, 11-channel
Control Modes	DMX-512, Master-slave, Stand Alone
DMX Functions	Auto programs, Color macro, CTC, Dimmer, Dimmer Curve, RGBW, Strobe
Control	4 buttons with LCD display
Tilt	185° movement
Operating Voltage	AC 110V - 240V, 50 - 60 Hz
Power Consumption	450W
Connections	IP65 Seetronic DMX data in/out, PowerCON Power in/out
Housing Material	Aluminium
Cabinet Color	Black
Protection Class IP	IP65
Cooling	IP65 temperature-controlled fans
Operating Temperature	-15 - 45 °C
Installation	2 x 2 quarter-turn locking points for one or two Omega brackets

Dimensions

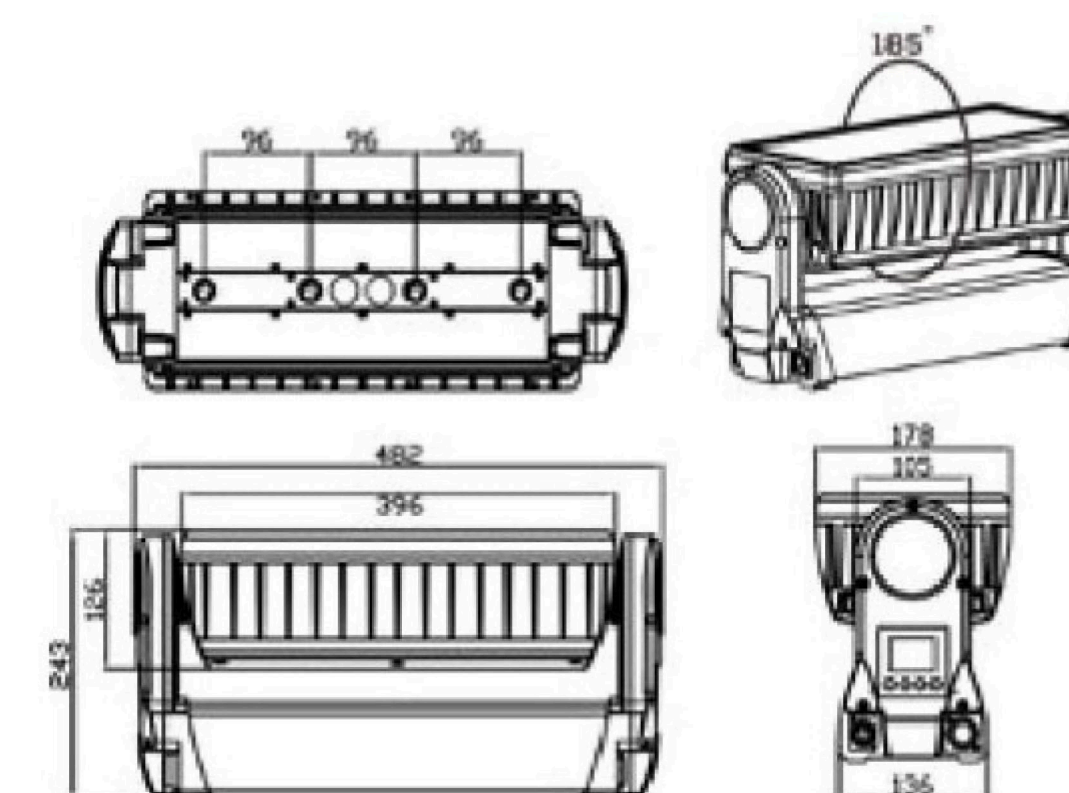

Photometric Data

