



3 different levels of brightness available
 1500 nits - 2500 nits - 5000 nits



super thin & light



easy maintenance



quick installation



simple design




high transparency

FEATURES

- The product design is simple but graceful which shows the sense of modern and technology.
- LX-CR has the ultra transparency(86%) which can meet the lighting requirements of buildings. And it also will not ruin the beauty of the building appearance.
- LX-CR has the unique display effect that is third dimension, It can make the advertisement more artistic.
- It inspires designer to present unique stage,presentation of great transparency, vivid color and technology makes performance outstanding and stylistic.
- It is really suitable for media building and creates a new way of outdoor media transmission which can be seen as a new market demand.

Pitch	Horizontal : 3.9 Vertical : 7.8	Horizontal : 7.8 Vertical : 7.8
Pixel Configuration	1921SMD	1206 SMD lighting
Module resolution (Pixels)	128 x 16	64 x 32
Module Size(mm)	500 x 125	500 x 250
Pixels density(Pixels/m2)	32,768	16,384
Viewing angle(H/V)	H:160 V:100	H:160 V:100
Brightness (cd/m2)	3 000	1 500
Cabinet size (mm x mm)	1000 x 500 x 68	1000 x 500 x 68
Cabinet Material	Aluminium die casting	Aluminium die casting
Cabinet Weight(kg)	~8,5	~8,5
Display Refresh rate(Hz)	≥1920	≥1920
Nominal input Voltage(V)	AC100-240	AC100-240
Input Power Frequency(Hz)	50/60	50/60
Max Input Power	~200W/cabinet	~200W/cabinet
Average Input Power	~100W/cabinet	~100W/cabinet
Lifespan	≥50 000	≥50 000

DETAILS

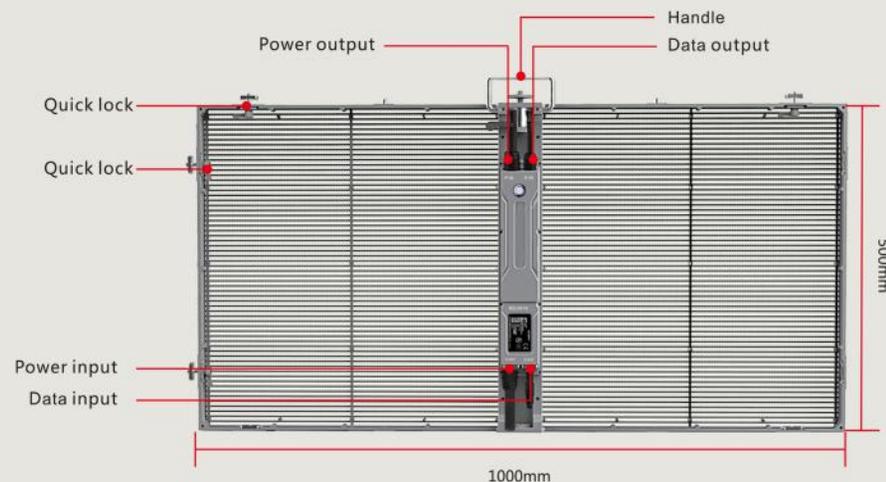

SYSTEM

