



## PARAMÈTRES

### Power supply

AC90-260V 50/60 Hz

Power consumption: 350W

### Light source

7\*40W RGBW 4 in1 Osram LEDs

Individual LED control

Average life: 50,000 hrs

Color temperature : 2500K-9000K adjustable

### Effect

Zoom angle: 4-60°.

Wash/Beam/Graphic/Effects function

Front lens can rotated infinity

With "vortex" and "kaleidoscope" effects

Variable built-in dynamic effects

4 Liner dimming curves

2 color mode (RGBW / CMY)

Strobe: 1-25 hz, random and pulse flash

### Control

Pan/Tilt: 540/270°


Control mode: DMX512

DMX channels: 21/35/42/49/63

XLR in & out: 3-pin


Net weight: 12kg

## Fixture size

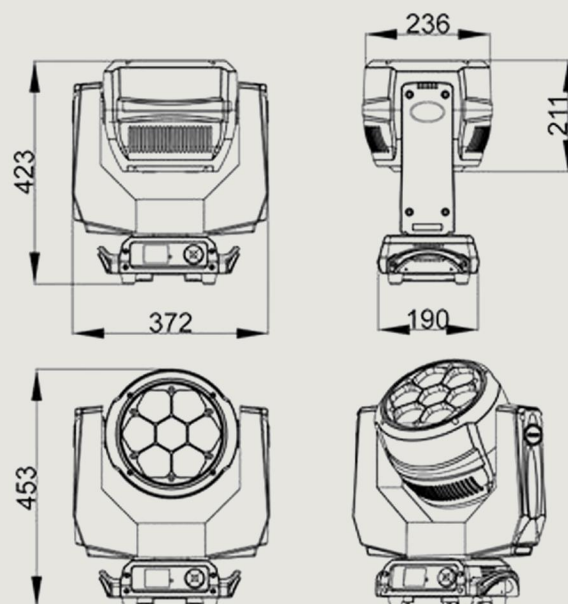


## Photometrics

W	(Lux)	41000	18000	4000
R	(Lux)	19800	5900	1300
G	(Lux)	28950	9600	5200
B	(Lux)	7200	2000	450
RGBW	(Lux)	69000	28600	8800

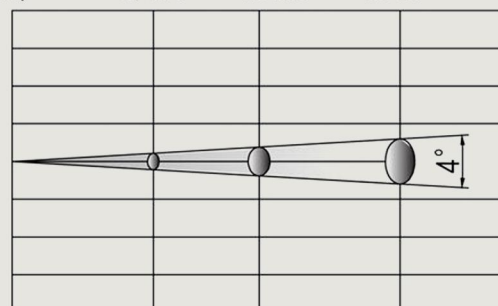

Distance (m)	3	5	10
Diameter (m)	0.46	1.0	2.0

W	(Lux)	1900	900	620
R	(Lux)	680	360	220
G	(Lux)	1100	520	360
B	(Lux)	190	220	78
RGBW	(Lux)	4300	2000	660

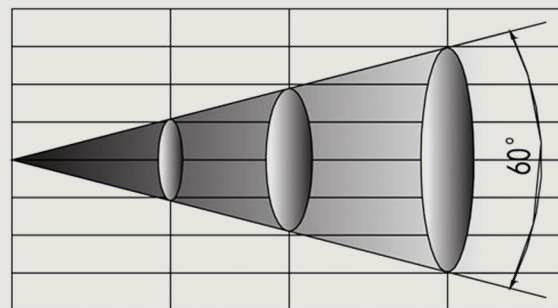

Distance (m)	3	5	10
Diameter (m)	2.1	3.2	5.6