



PARAMÈTRES

■ Power supply

AC90-260V 50/60 Hz

Power consumption: 850W

■ Light source

19*40w RGBW 4 in1 Osram LEDs

Individual LED control

Average life: 50,000 hrs

Color temperature: 2500K-9000K

■ Effect

Zoom angle: 4-60°, 56000lux@5m@Min angle

Wash/Beam/Graphic/Effects function

Front lens can rotated infinity

With "vortex" and "kaleidoscope" effects

Variable built-in dynamic effects

4 Liner dimming curves

2 color mode (RGBW / CMY)

Strobe: 1-25 hz, random and pulse flash

■ Control

Pan/Tilt: 540/270°

Control mode: DMX512/Art-net

DMX channels: 21/35/78/92/97

XLR in & out: 3-pin & net

Self-charging battery

Net weight: 20kg

Carton box(1-in-1):

Size: 69×56×49cm


Packed weight: 28kg

Flight case(2-in-1):

Size: 120×84×47cm


Packed weight: 96kg

Fixture size

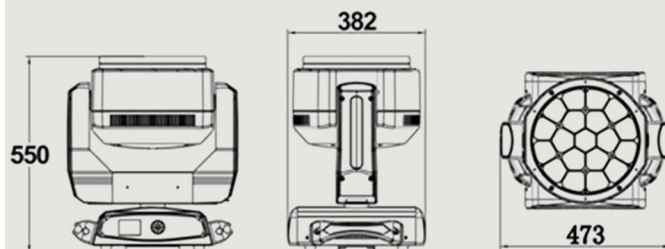


Photometrics

W	(Lux)	95000	36000	11000
R	(Lux)	30000	13000	3600
G	(Lux)	54000	19600	9800
B	(Lux)	20000	5600	1200
RGBW	(Lux)	140000	56000	16800

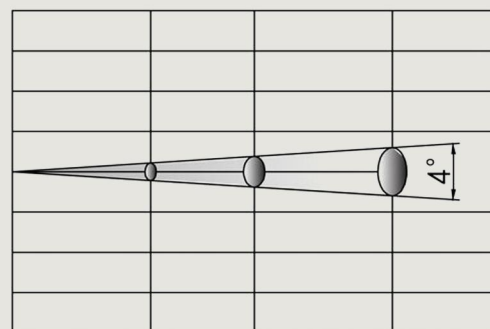

Distance (m)	3	5	10
Diameter (m)	0.55	0.65	1.25

W	(Lux)	5200	2600	1700
R	(Lux)	1900	1000	600
G	(Lux)	3000	1420	920
B	(Lux)	600	360	140
RGBW	(Lux)	12000	4600	1800

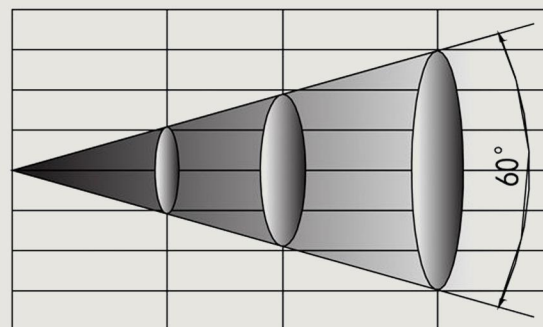

Distance (m)	3	5	10
Diameter (m)	1.8	3.0	6.0