




## INSCREEN K-BOARD TV

**Standard 2K/4K Display**  
Multiple sizes to meet different application scenarios

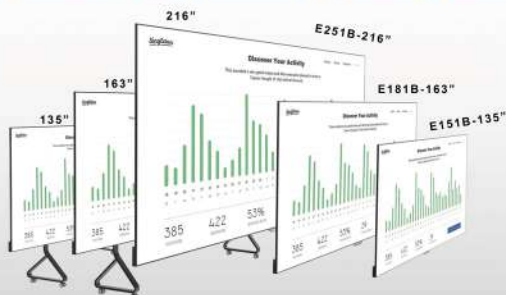

### Stable & Reliable Bracket with Independent R&D Patent



### Easy Installation and Quick Maintenance

**Segmented installation design**  
Increase the installation efficiency



**Separate Intelligent Control Box**  
Tidy and compact



**Front maintenance**  
Easy and quick



**Various Interfaces**  
Easy to operate

### Immersive Full Screen Solution



- Ultra-thin Design
- Thinnest thickness <25mm
- Screen Thickness is 35mm
- Wall Mounted Thickness <60mm



**Smart**



|                     |   |  |  |
|---------------------|---|--|--|
| Operating System    | Android 8.0   |  |  |
| Screen Size         | 135"  | 163"   | 216"   |
| Resolution          | 1920 x 1080   |  |  |
| Display Size        | 3000mm x 1687mm   | 3600mm x 2025 mm                                 | 4800mm x 2700mm                                  |
| Brightness          | 100 - 600 cd/m2 ( 8 level adjustable )  |  |  |
| Contrast            | 4000:1  |  |  |
| Grayscale           | 14 bit  |  |  |
| Refresh Rate        | 2880 Hz   |  |  |
| Viewing Angle       | 160° (H) / 140° (V)   |  |  |
| Response Time       | ≤ 0.5ms (Typ)   |  |  |
| Video Interface     | HDMI x3 ( 2 Input 1 output ), USB 3.0 x1 , USB 2.0 x2                               |  |  |
| Audio Interface     | External Audio Interface  |  |  |
| Control Interface   | RJ45 x1, USB-B x1, Bluetooth, WIFI, Infrared remote control                         |  |  |
| Input Voltage       | 220V-240V~ 50/60Hz  |  |  |
| Power Consumption   | ≤ 840W (Average) / ≤2800W (Max)   | ≤ 810W (Average) / ≤2700W (Max)                  | ≤ 1260W (Average) / ≤4200W (Max)                 |
| Physical Size       | 3020mm x 1708mm x 60mm (Not Include Base Weight)                                    | 3620mm x 2046mm x 60mm (Not Include Base Weight) | 4821mm x 2721mm x 60mm (Not Include Base Weight) |
| Weight              | 150Kg (Not Include Base Weight)   | 190Kg (Not Include Base Weight)                  | 380Kg (Not Include Base Weight)                  |
| Installation        | Wall Mounting (Standard) / Movable Installation (Optional)                          |  |  |
| Storage Temperature | -20°C~50°C  |  |  |
| Working Temperature | -10°C~40°C  |  |  |
| Working Humidity    | 10%~60%RH   |  |  |
| Lifespan            | ≥100,000 hrs  |  |  |
| Accessories         | Hanger kits, remote controller, magnetic tool, spare parts, HDMI cable, user manual |  |  |