


K-LINE P 1.9



K-LINE 1200 P1.9 / K-LINE 800 P1.9

PARAMÈTRES

- Pixel Pitch (mm): P1.9
- Pixel Density (dot/m2) : 23 040
- LED sealing Type : SMD1010
- LED Configuration : 1R1G1B
- Module Size (mm x mm): 405.6 x 76
- Module Resolution: 192x40
- Module Weight (kg): 0,4
- Cabinet Size (mm x mm): 1216 x 82 x 22.5 866 x 82 x 22.5
- Cabinet Resolution: 576 x 40 384 x 40
- Around Cabinet Weight (kg): 3 2,3
- Average Cabinet Power Consumption: 32W
- Max. Cabinet Power Consumption: 80W
- Drive Mode: Constant current drive
- Scanning mode: 1/32
- Horizontal Viewing Angle: left 70°, right 70°
- Vertical Viewing Angle: up 70°, down 70°
- Brightness (cd/m2): 500
- Grey Scale (bit) : 14bit
- Refresh Rate (Hz): 1920
- Input Voltage (V): 110-220V
- Working Temperature (°C): -20~ +40
- working humidity (RH): 10%~90%
- Storage temperature range(°C): -40~ +80
- Operation humidity (RH): 10%~90%
- Waterproof Level: IP20
- working life: ≥50000
- Working Environment: Indoor
- Installtion Method: fixed installation
- Certificates: CE, ETL, FCC etc.

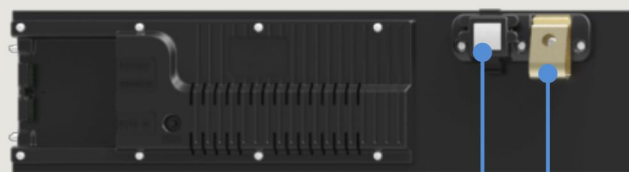

Magnet

Fixed Buckle

