




**K-LINE INDOOR
HAUTE LUMINOSITÉ**

P1.9 - P2.6 - P3.1 - P3.9

E06

Product Structure

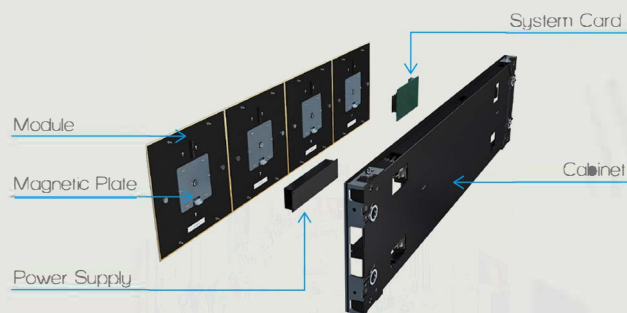

**Total Front Maintenance
Convenient, save space.**



PARAMÈTRES

Code	K-LINE P1.9	K-LINE P2.6	K-LINE P3.1	K-LINE P3.9
Model name	Inscreen K-Line P1.9	Inscreen K-Line P2.6	Inscreen K-Line P3.1	Inscreen K-Line P3.9
Pixel Pitch (mm)	1.953	2.604	3.125	3.906
Pixel Density (dot/m2)	262144	147456	102400	65536
LED Type	SMD1010	SMD2121	SMD2121	SMD2121
Module Size (mm x mm)	250 x 250	250 x 250	250 x 250	250 x 250
Cabinet Size (mm x mm)	1000 x 250 x 42			
Cabinet Weight (±0.25Kg)	6	6	6	6
Module Resolution(px*px)	526 x 128	384 x 96	320 x 80	256 x 64
Horizontal Viewing Angle (Deg)	140	140	140	140
Vertical Viewing Angle (Deg)	140	140	140	140
Brightness (cd/m2)	2000	4000	4000	4000
Grey Scale (bit)	16 bit	16 bit	16 bit	16 bit
Refresh Rate (Hz)	3840	3840	3840	3840
Maximum Cabinet Power Consumption (w)	134	134	134	134
Average Cabinet Power Consumption (w)	53.6	53.6	53.6	53.6
Input Voltage	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V
Waterproof Level	IP20	IP20	IP20	IP20
Working Environment	Indoor	Indoor	Indoor	Indoor