


PARAMÈTRES P8

- **Pixel Pitch** : 8.3mm
- **LED Type** : 3-in-1 SMD
- **LED Configuration** : 1Red,1Green,1Blue
- **Brightness** : 7000cd/m²
- **Pixel Density** : 14,400 pixels/m²
- **Module Size** : W400mm×H200mm×D24mm
- **Module Number** : W3×H4
- **Cabinet Size** : W1200×H1000×D122
- **Pixels Per Panel** : 144×120
- **Area** : 1,2 m²
- **Weight** : 36 kg/panel
- **Recommended Viewing Distance** : ≥8 m
- **Material** : Aluminum
- **Environment** : Outdoor
- **Ingress Protection** : IP65/IP54
- **Operating Temperature/Humidity** : -20°C~+50°C/10~90%RH
- **Storage Temperature/Humidity** : -30°C~+60°C/10~95%RH
- **Maintenance** : Front and Rear
- **Gap Between Modules** : Seamless
- **Bezel Width** : None
- **Horizontal Viewing Angle** : 160°
- **Vertical Viewing Angle** : 145°
- **Color Temperature** : 2000-9300K
- **Colors** : 4.4 Trillion
- **Brightness Control** : Manual/Automatic
- **Contrast Ratio** : 6000:1
- **Input Power <Max>** : 660W/m²
- **Input Power <Typical>** : 220W/m²
- **Driving Method** : Constant Current Drive
- **Video Frame Rate** : 50/60 Hz
- **Rate Refresh** : ≥1920 Hz
- **Input Voltage** : 100~240VAC
- **Input Power Frequency** : 47~63 Hz
- **Input Signal** : RF,S-VIDEO,RGBHV,YUV,YC & COMPOSITION, etc
- **LED Life Time** : ≥100,000 Hours
- **Standard Mounting Configuration** : Fixed
- **Professional Services** : Design, configuration, install and service available
- **Data Interconnection** : CAT5 Cable; multi-mode fiber; single mode fiber

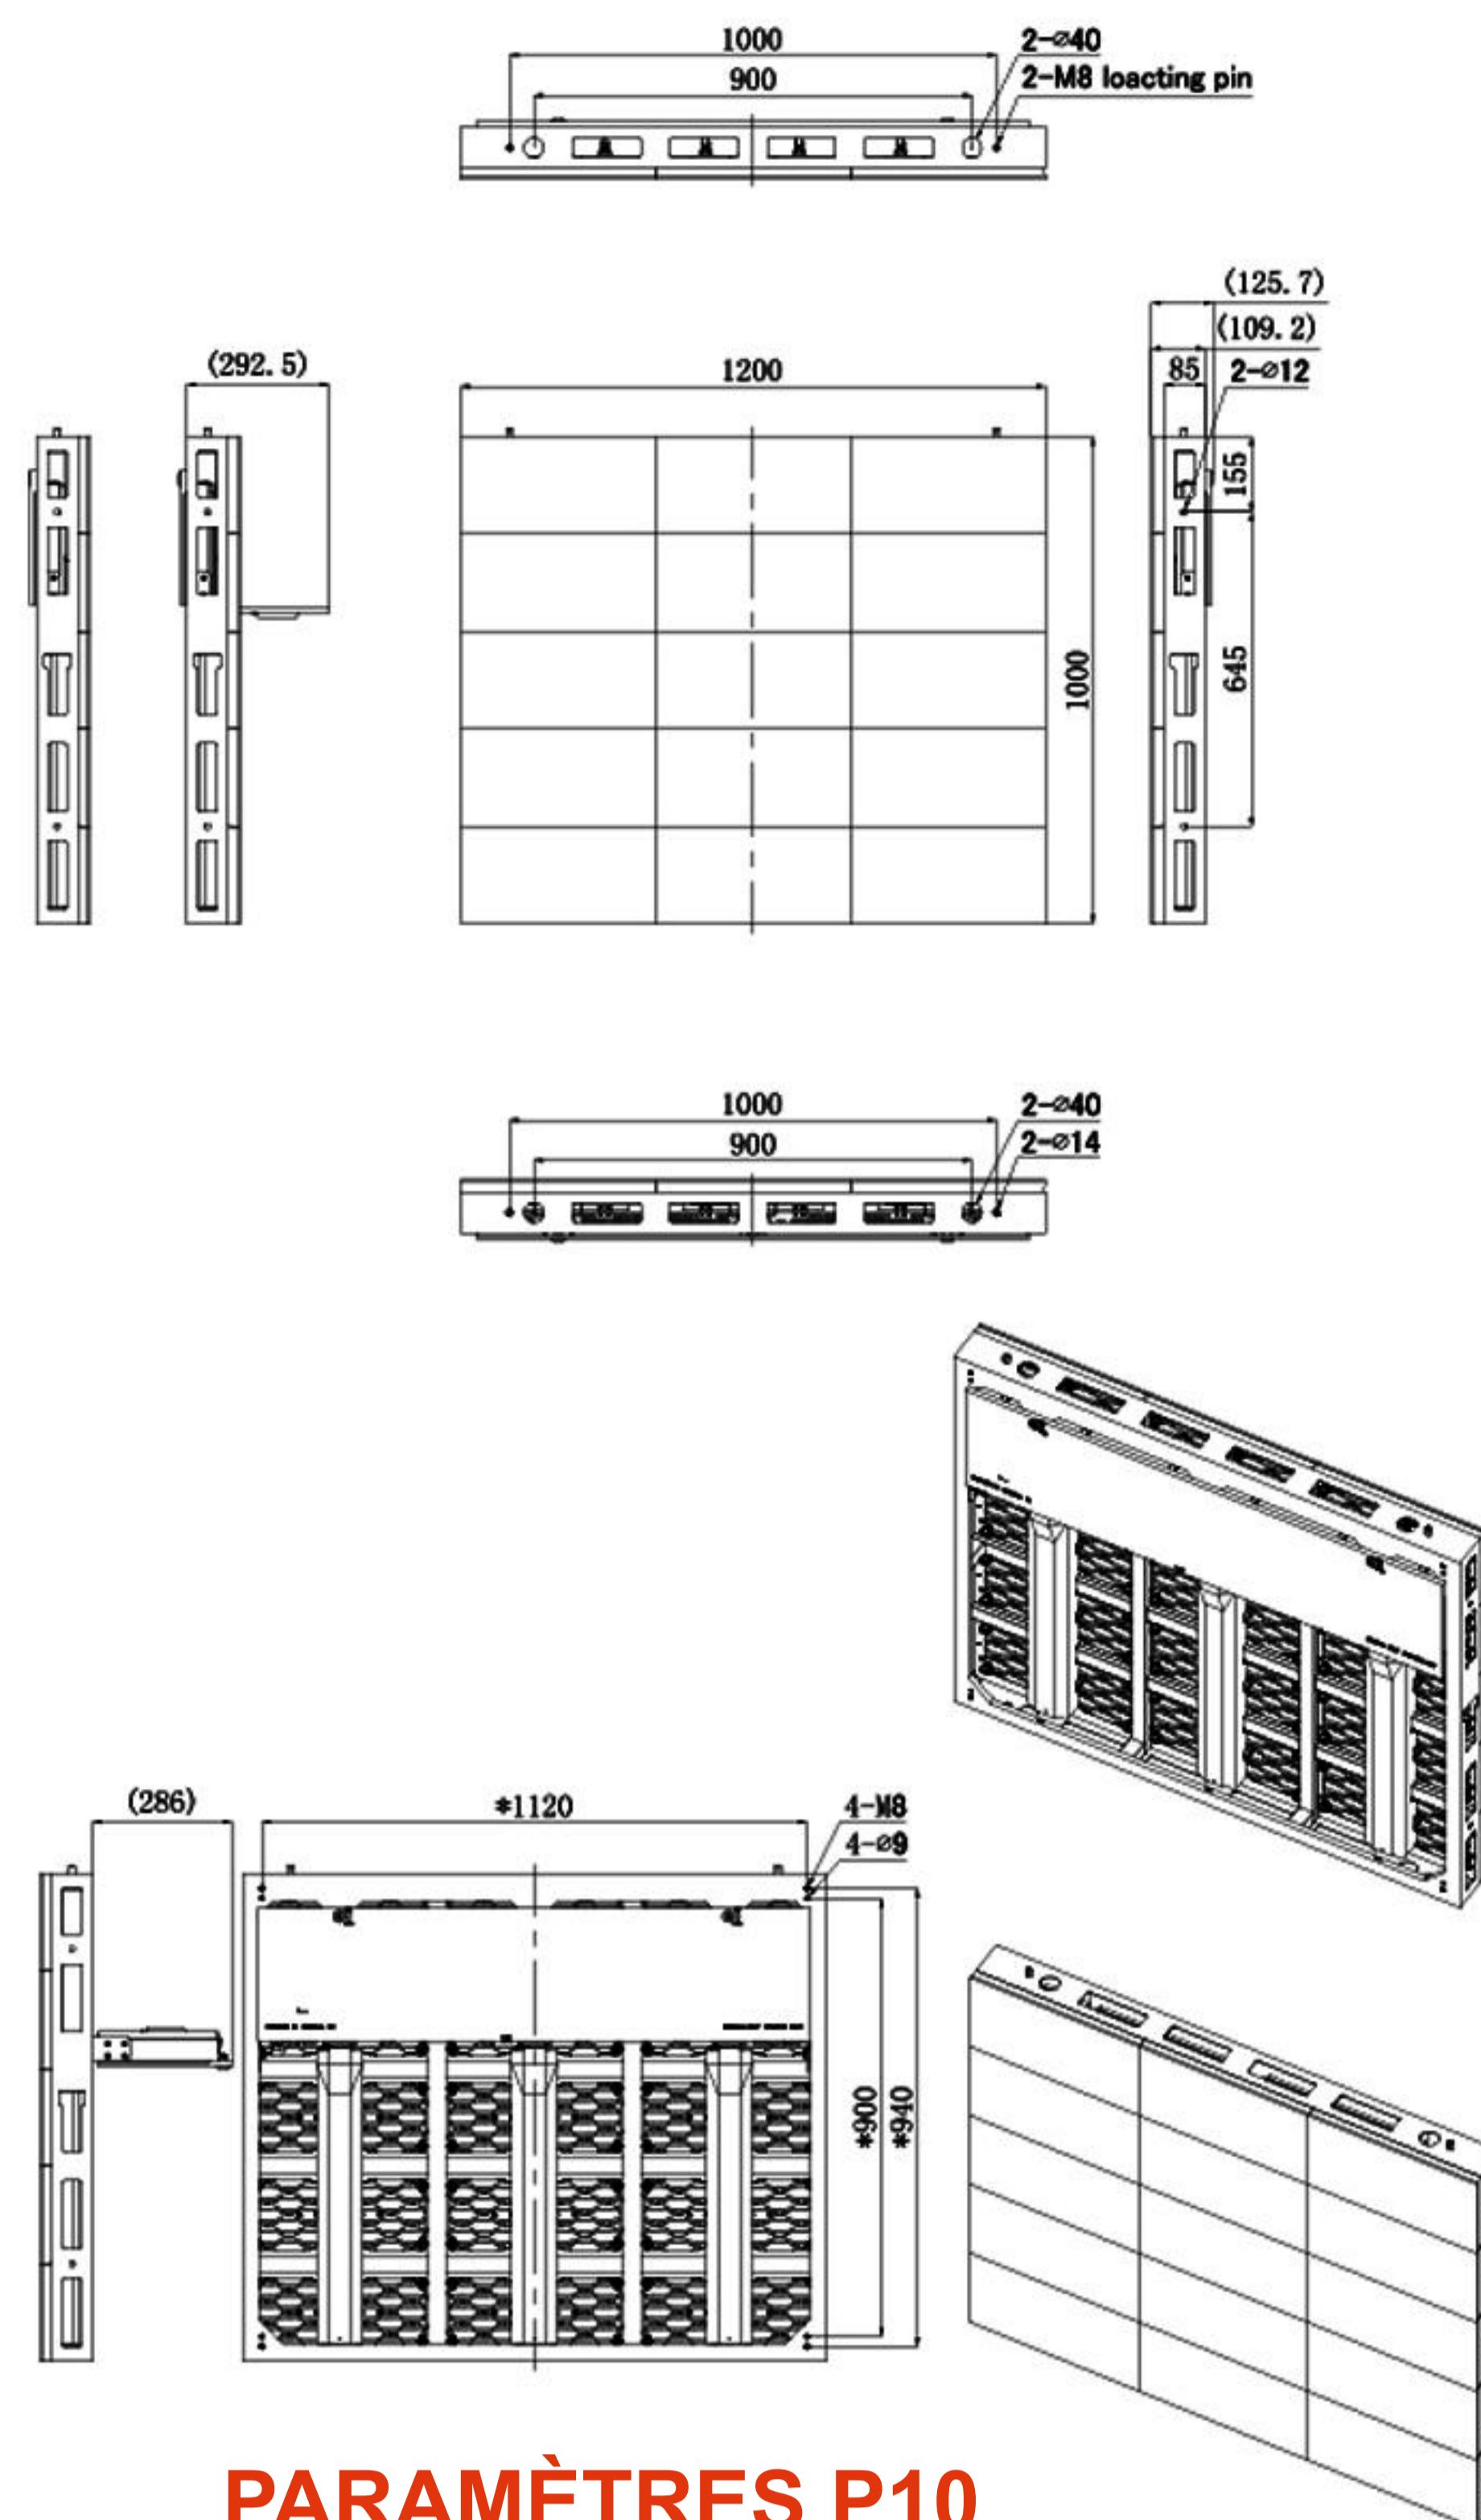

PARAMÈTRES P10

- **Pixel Pitch** : 10mm
- **LED Type** : 3-in-1 SMD
- **LED Configuration** : 1Red,1Green,1Blue
- **Brightness** : 7000cd/m²
- **Pixel Density** : 10,000 pixels/m²
- **Module Size** : W400mm×H200mm×D24mm
- **Module Number** : W3×H4
- **Cabinet Size** : W1200×H1000×D126
- **Pixels Per Panel** : 120×100 Dots
- **Area** : 1,2 m²
- **Weight** : 44 kg/panel
- **Recommended Viewing Distance** : ≥10 m
- **Material** : Aluminum
- **Environment** : Outdoor
- **Ingress Protection** : IP65/IP54
- **Operating Temperature/Humidity** : -20°C~+50°C/10~90%RH
- **Storage Temperature/Humidity** : -30°C~+60°C/10~95%RH
- **Maintenance** : Front and Rear
- **Gap Between Modules** : Seamless
- **Bezel Width** : None
- **Horizontal Viewing Angle** : 160°
- **Vertical Viewing Angle** : 145°
- **Color Temperature** : 2000-9300K
- **Colors** : 4.4 Trillion
- **Brightness Control** : Manual/Automatic
- **Contrast Ratio** : 6000:1
- **Input Power <Max>** : 650W/m²
- **Input Power <Typical>** : 215W/m²
- **Driving Method** : Constant Current Drive
- **Video Frame Rate** : 50/60 Hz
- **Rate Refresh** : ≥1920 Hz
- **Input Voltage** : 100~240VAC
- **Input Power Frequency** : 47~63 Hz
- **Input Signal** : RF,S-VIDEO,RGBHV,YUV,YC & COMPOSITION, etc
- **LED Life Time** : ≥100,000 Hours
- **Standard Mounting Configuration** : Fixed
- **Professional Services** : Design, configuration, install and service available
- **Data Interconnection** : CAT5 Cable; multi-mode fiber; single mode fiber