



PARAMÈTRES

Power supply

AC90-260V 50/60 Hz

Power consumption: 1200W

Light source

25*40W RGBW 4 in1 Osram LEDs

Individual LED control

Average life: 50,000 hrs

Color temperature: 2500K-9000K

Effect

Zoom angle: 4-60°;

Variable Built-in dynamic effects

4 Liner dimming curves

2 color mode (RGBW / CMY)

Strobe: 1-25 hz, random and pulse flash

Self-charging battery

Control

Pan/Tilt: Infinity

Control mode: DMX512/Art-net

DMX channels: 19/22/118

XLR in & out: 3-pin & net

Net weight: 27kg

Carton box(1-in-1):


Size: 77×65×50cm

Packed weight: 30kg

Flight case(2-in-1):


Size: 96×59×88cm

Fixture size

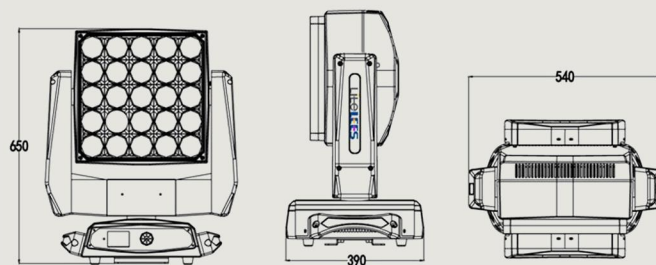


Photometrics

W	(Lux)	97000	43000	15300
R	(Lux)	37000	17800	4200
G	(Lux)	60000	31500	9900
B	(Lux)	34000	11000	2600
RGBW	(Lux)	162000	76000	26000

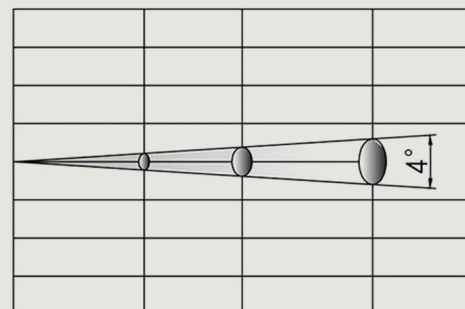

投射距离 (M)	3	5	10
光斑直径 (M)	0.50	0.67	1.09

W	(Lux)	9400	4100	2000
R	(Lux)	5100	1800	900
G	(Lux)	7800	1600	1000
B	(Lux)	1900	400	190
RGBW	(Lux)	14000	4800	1300

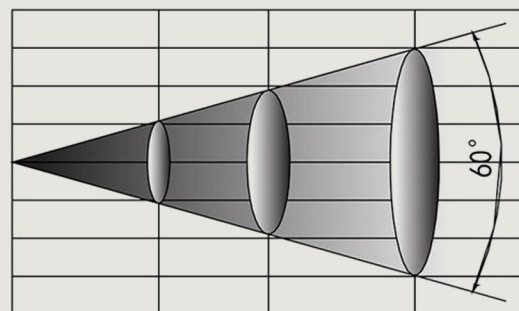

投射距离 (M)	3	5	10
光斑直径 (M)	1.8	3.0	6.0